
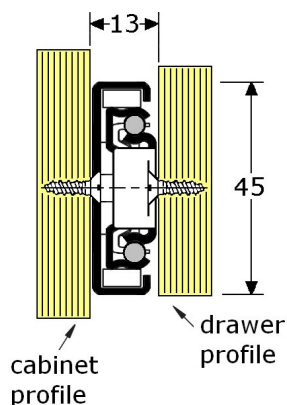


TELESCOPIC SLIDES, steel zinc plated

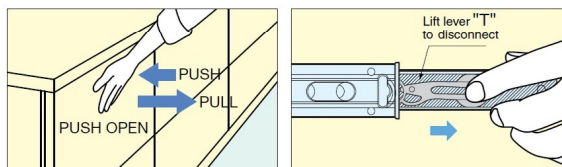

902401

precision ball bearing slide "push-to-open"

steel zinc plated

full extension (3-parts), extension lengths 100%

space required only 13mm, height 45mm, side mounting

"touch-latch", can be used for drawers without handle

keep 6mm gap between front and cabinet, 20mm spring loaded with nylon parts between the profiles

for closing: last 20mm need more power to close

the inner rail can be easily front disconnected by pressing the draw lock (T), only visible if the drawer is full open

with screwholes (4,4mm/M4)


sales by pair (but left&right are the same)

type	length	extension	width	load capacity	per
4060	310mm	300mm	13mm	25 Kg/Pr	10 Pr

for stainless steel telescopic slides with ball bearing
single extension for 25-50 Kg/pair, see page GY-912a

for stainless steel telescopic slides with ball bearing
full extension for 40-52 Kg/pair, see page GY-913a

for stainless steel telescopic slides with ball bearing
full extension for 180-270 Kg/pair, see page GY-912b

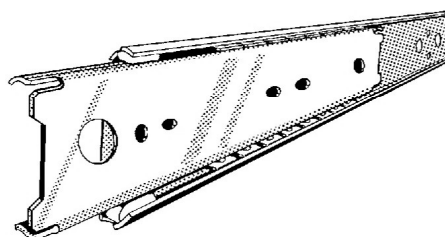


PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl



big space for
looking to the
screwholes



dismounting by pressing
the draw lock (T)

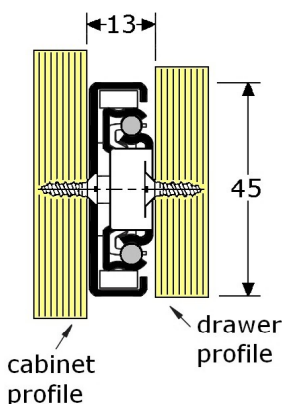

902450
902451
902452
902453
902454
902455
902456
902457

precision ball bearing slide
steel zinc plated
full extension slide, extension lengths 100%
space required only 13mm, height 45mm, side mounting


maximum loading 42-45 Kg/pair normal vertical use
(for flat horizontal use, the loading capacity is only 25%)
with nylon parts between the profiles
with black rubber endstop/holder at the end of the profile
the inner rail can be easily front disconnected by pressing
the draw lock (T), only visible if the drawer is full open

with screwholes (4,5mm/M4)
sales by pair (but left&right are the same)
(also possible in stainless steel, see page GY-913a)

type	length	extension	width	load capacity	per
V-50	250mm	250mm	13mm	45 Kg/Pr	10 Pr
V-50z	300mm	300mm	13mm	45 Kg/Pr	15 Pr
V-50	350mm	350mm	13mm	45 Kg/Pr	10 Pr
V-50	400mm	400mm	13mm	45 Kg/Pr	10 Pr
V-50z	450mm	450mm	13mm	45 Kg/Pr	15 Pr
V-50	500mm	500mm	13mm	44 Kg/Pr	10 Pr
V-50	550mm	550mm	13mm	43 Kg/Pr	10 Pr
V-50	600mm	600mm	13mm	42 Kg/Pr	10 Pr



EasyClose

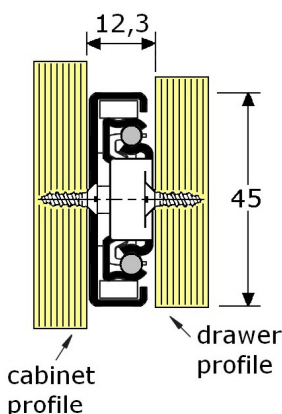

902431
902432
902433
902434
902435
902436
902437
902439

precision ball bearing slide
steel zinc plated
full extension slide
space required only 12,3mm, height 45mm, side mounting

maximum loading 40 Kg/pair normal vertical use
(for flat horizontal use, the loading capacity is only 25%)
with nylon parts between the profiles
with endstop/holder at the end of the profile




with integrated EasyClose soft closing
the inner rail can be easily front disconnected by pressing
the draw lock (T), only visible if the drawer is full open

with screwholes (4,5mm/M4)
sales by pair (but left&right are the same)

type	length	extension	width	load capacity	per
EV-5R	305mm	245mm	12,3mm	40 Kg/Pr	10 Pr
EV-5	355mm	347mm	12,3mm	40 Kg/Pr	10 Pr
EV-5R	405mm	397mm	12,3mm	40 Kg/Pr	10 Pr
EV-5	450mm	447mm	12,3mm	40 Kg/Pr	10 Pr
EV-5R	500mm	497mm	12,3mm	40 Kg/Pr	10 Pr
EV-5T	550mm	547mm	12,3mm	40 Kg/Pr (A)	15 Pr
EV-5T	600mm	597mm	12,3mm	40 Kg/Pr (A)	15 Pr
EV-5T	700mm	697mm	12,3mm	40 Kg/Pr (A)	15 Pr



PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl

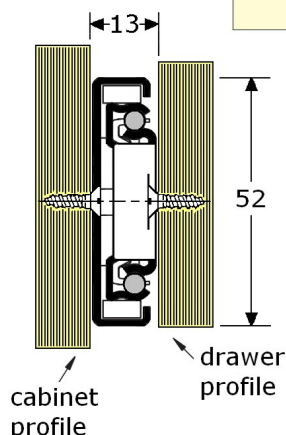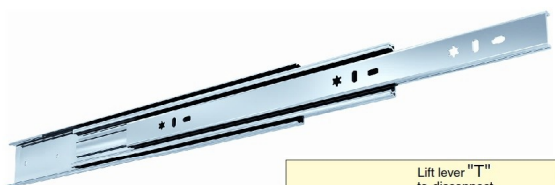

902803
902805
902806
902807
902809



precision ball bearing slide
steel zinc plated
full extension slide, extension lengths 100%
space required only 13mm, highness 52mm, side mounting

maximum loading 81-90 Kg/pair normal vertical use
(for flat horizontal use, the loading capacity is only 25%)
with nylon parts between the profiles
with black rubber endstop/holder at the end of the profile

the inner rail can be easily front disconnected by pressing the draw lock (T), only visible if the drawer is full open

with screwholes (4,5mm/M4)
sales by pair (but left&right are the same)

type	length	extension	width	load capacity	per
V-52	400mm	400mm	13mm	90 Kg/Pr	10 Pr
V-52	500mm	500mm	13mm	90 Kg/Pr	8 Pr
V-52	550mm	550mm	13mm	90 Kg/Pr	8 Pr
V-52	600mm	600mm	13mm	90 Kg/Pr	6 Pr
V-52	700mm	700mm	13mm	81 Kg/Pr	6 Pr

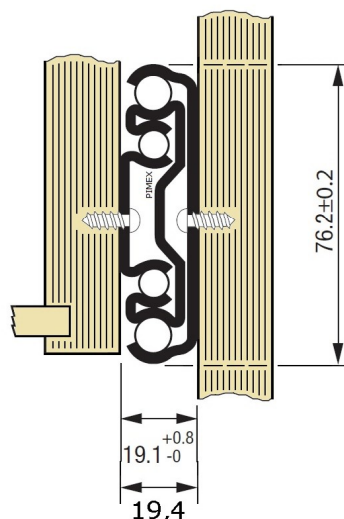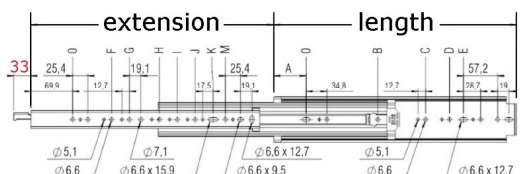

903045
903047
903049
903052
903054
903056
903057
903059

precision ball bearing slide, heavy duty
steel zinc plated
full extension slide, extension lengths 100%
space required 19,4mm, highness 76mm, side mounting

maximum loading 150-250 Kg/pair normal vertical use
(for flat horizontal use, the loading capacity is only 25%)
with nylon endstop/holder at the end of the profile
slide is very stable, slide cannot be disconnected


slide is blocked by red/steel security knob of 33mm
opening only possible by pushing both knobs down

with different screwholes
sales by pair (but left&right are the same)

type	length	extension	width	load capacity	per
FL9N	51cm	51cm	19,4mm	250 Kg/Pr	4 Pr
FL9N	61cm	61cm	19,4mm	250 Kg/Pr	2 Pr
FL9N	72cm	72cm	19,4mm	250 Kg/Pr	2 Pr
FL9N	82cm	82cm	19,4mm	225 Kg/Pr	2 Pr
FL9N	92cm	92cm	19,4mm	225 Kg/Pr	1 Pr
FL9N	102cm	102cm	19,4mm	225 Kg/Pr	1 Pr
FL9N	122cm	122cm	19,4mm	180 Kg/Pr	1 Pr
FL9N	152cm	152cm	19,4mm	150 Kg/Pr	1 Pr



PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl

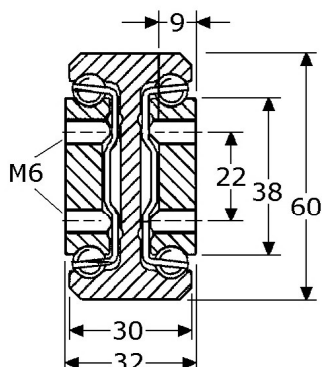


903157
903159
903162
903164
903166
903167
903169

precision ball bearing slide, heavy duty
steel black plated
full extension (3-parts), extension lengths 100%
space required 32mm, highness 60mm, side mounting

with harded steel ball bearing, not noiseless
slide is very stabile and needs accurate mounting
with blue plastic stop block, slide cannot be disconnected
load capacity based on normal vertical (drawer) use
(for flat horizontal use, the load capacity is only 30%)
the outer rail: with double tapped screwholes M6
the inner rail: with double tapped screwholes M6
sales by pair (but left&right are the same)

length	extension	width	load capacity	per
600mm	600mm	32mm	500 Kg/Pr	1 Pr
700mm	700mm	32mm	500 Kg/Pr	1 Pr
800mm	800mm	32mm	500 Kg/Pr	1 Pr
900mm	900mm	32mm	465 Kg/Pr	1 Pr
1000mm	1000mm	32mm	430 Kg/Pr	1 Pr
1200mm	1200mm	32mm	360 Kg/Pr	1 Pr
1500mm	1500mm	32mm	225 Kg/Pr	1 Pr

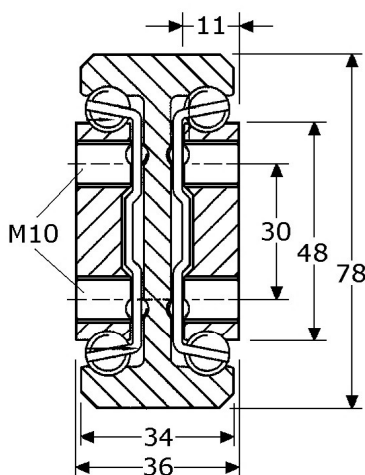

903177
903179
903186
903187
903188
903189
903197

precision ball bearing slide, heavy duty
steel zinc plated
full extension (3-parts), extension lengths 100%
space required 36mm, highness 78mm, side mounting

with harded steel ball bearing, not noiseless
slide is very stabile and needs accurate mounting
with blue plastic stop block, slide cannot be disconnected
load capacity based on normal vertical (drawer) use
(for flat horizontal use, the load capacity is only 30%)
the outer rail: with double tapped screwholes M10
the inner rail: with double tapped screwholes M10
sales by pair (but left&right are the same)

length	extension	width	load capacity	per
600mm	600mm	36mm	900 Kg/Pr	1 Pr
700mm	700mm	36mm	900 Kg/Pr	1 Pr
1000mm	1000mm	36mm	750 Kg/Pr	1 Pr
1200mm	1200mm	36mm	650 Kg/Pr	1 Pr
1400mm	1400mm	36mm	550 Kg/Pr	1 Pr
1500mm	1500mm	36mm	500 Kg/Pr	1 Pr
2000mm	2000mm	36mm	250 Kg/Pr	1 Pr



PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl