
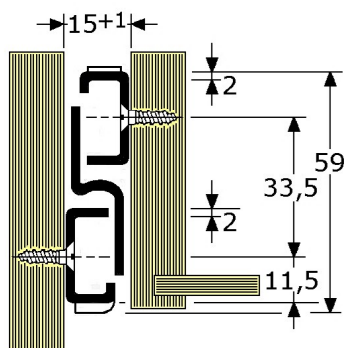


911341
911342
911343
911344
911345
911346
911327
911328
911329

single extension drawer slide (2-parts)
steel white coated or steel cream coated (RAL-9001)
single extension 75%
space required 12mm, for bottom mounting
with (per pair) 4 rollers ø22mm
non-return groove in the front of the cabinet profile
for keeping the drawer in closed position


type	length	extension	width	load capacity	per
white	300mm	215mm	12mm	30 Kg/Pr	20 Pr
white	350mm	265mm	12mm	30 Kg/Pr	20 Pr
white	400mm	300mm	12mm	30 Kg/Pr	20 Pr
white	450mm	350mm	12mm	30 Kg/Pr	20 Pr
white	500mm	400mm	12mm	30 Kg/Pr (A)	20 Pr
white	550mm	445mm	12mm	30 Kg/Pr (A)	20 Pr
MR-132	600mm	490mm	12mm	30 Kg/Pr	20 Pr
MR-132	650mm	540mm	12mm	30 Kg/Pr	2 Pr
MR-132	700mm	580mm	12mm	30 Kg/Pr	20 Pr

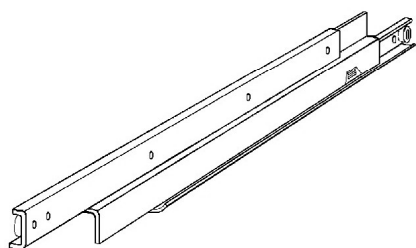

926740
926741
926742

full extension drawer slides with white rollers
steel cream coated (RAL-9001)
full extension +15mm, highness 59mm, side mouting
protection between unitted disconnecting by demontable
white nylon locking device, but drawer can easy be demounted
if you pull out the drawer full, the drawer will be blocked in
the locking device; lift up the front, drawer can be taken out
for fixing with screws 4mm

type	length	extension	width	load capacity	per
MR-674	250mm	265mm	15mm	50 Kg/Pr	11 Pr
MR-674	300mm	315mm	15mm	50 Kg/Pr	6 Pr
MR-674	350mm	365mm	15mm	50 Kg/Pr	3 Pr

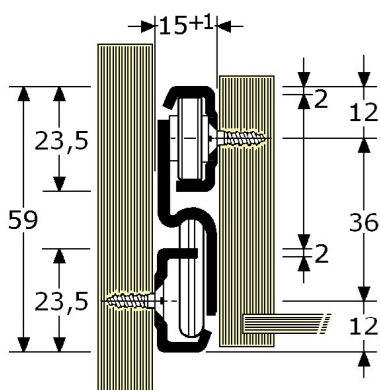


926761
926763
926764
926766

full extension drawer slides with white rollers
steel white coated
full extension +0/30mm, highness 59mm, side mounting
protection between unitted disconnecting by fixed
black nylon locking device, but drawer can easy be demounted
if you pull out the drawer full, the drawer will be blocked in
the locking device; lift up the front, drawer can be taken out
for fixing with screws 4mm

type	length	extension	width	load capacity	per
W-60	300mm	300mm	15mm	50 Kg/Pr	6 Pr
W-60	400mm	430mm	15mm	50 Kg/Pr	11 Pr
W-60	450mm	480mm	15mm	50 Kg/Pr	6 Pr
W-60	550mm	580mm	15mm	50 Kg/Pr	6 Pr



PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl

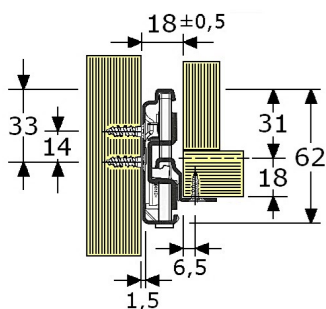


926863
926864
926866
926867

full extension drawer slide (3-parts)
steel white coated
full extension +/-30mm, progressive action, highness 62mm
space required 18mm, for bottom mounting with screwholes

with (p/Pr) 10 white DELRIN rollers ø26mm
all rollers placed on middle profile
maximum loading 60 Kg/pair (only for normal vertical use)

without softclosing
cabinet profile and drawer profile with screwholes 3,5/4mm

type	length	extension	width	load capacity	per
W-86	415mm	385mm	18mm	60 Kg/Pr	5 Pr
W-86	465mm	435mm	18mm	60 Kg/Pr	5 Pr
W-86	565mm	535mm	18mm	60 Kg/Pr	2 Pr
W-86	615mm	585mm	18mm	60 Kg/Pr	5 Pr

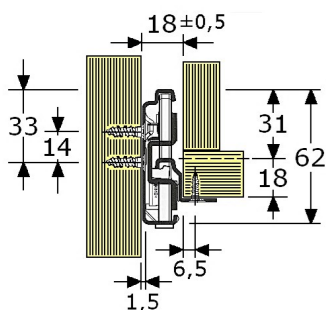


926882
926883
926884
926885
926886
926887

full extension drawer slide (3-parts)
steel white coated
full extension +/-30mm, progressive action, highness 62mm
space required 18mm, for bottom mounting with screwholes

with (p/Pr) 10 white DELRIN rollers ø26mm
all rollers placed on middle profile
maximum loading 60 Kg/pair (only for normal vertical use)

with (removable) integrated (black) EasyClose softclosing
protection between unintended disconnecting with switch (T)
high lateral stability through specially formed profiles & rollers
with nylon parts between the profiles prevent metallic noise
cabinet profile and drawer profile with screwholes 3,5/4mm

type	length	extension	width	load capacity	per
EW-86	365mm	335mm	18mm	55 Kg/Pr	5 Pr
EW-86	415mm	385mm	18mm	55 Kg/Pr	5 Pr
EW-86	465mm	435mm	18mm	55 Kg/Pr	5 Pr
EW-86	515mm	485mm	18mm	55 Kg/Pr	5 Pr
EW-86	565mm	535mm	18mm	55 Kg/Pr	5 Pr
EW-86	615mm	585mm	18mm	55 Kg/Pr	5 Pr

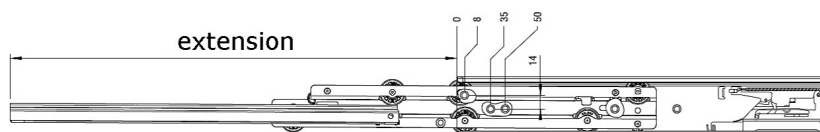

PIMEX B.V.
Coenecoop 131
2741 PJ WADDINXVEEN (NL)
Tel. (31) 182 - 61 11 66
Email: info@pimex.nl