




single extension drawer slide (2-parts)
 steel white coated or steel cream coated (RAL-9001)
 single extension 75%
 space required 12mm, for bottom mounting
 with (per pair) 4 rollers ø22mm
 non-return groove in the front of the cabinet profile
 for keeping the drawer in closed position

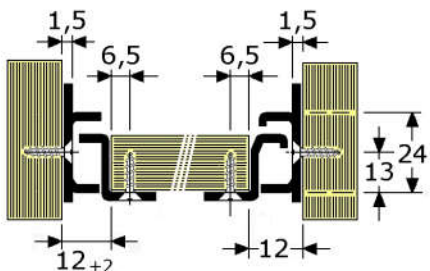

type	length	extension	width	load capacity	per
911320	MR-132 250mm	170mm	12mm	30 Kg/Pr	15 Pr
911341	white 300mm	215mm	12mm	30 Kg/Pr	20 Pr
911332	white 350mm	265mm	12mm	30 Kg/Pr	20 Pr
911333	white 400mm	300mm	12mm	30 Kg/Pr	20 Pr
911324	MR-132 450mm	360mm	12mm	30 Kg/Pr	20 Pr
911335	white 500mm	400mm	12mm	30 Kg/Pr	17 Pr
911326	MR-132 550mm	445mm	12mm	30 Kg/Pr	20 Pr
911327	MR-132 600mm	490mm	12mm	30 Kg/Pr	20 Pr
911328	MR-132 650mm	540mm	12mm	30 Kg/Pr	2 Pr
911329	MR-132 700mm	580mm	12mm	30 Kg/Pr	20 Pr

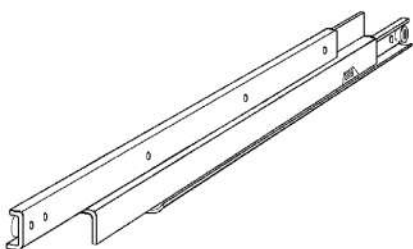


full extension drawer slides with white rollers
 steel cream coated (RAL-9001)
 full extension +15mm, highness 59mm, side mouting
 protection between unitted disconnecting by demontable
 white nylon locking device, but drawer can easy be demounted
 if you pull out the drawer full, the drawer will be blocked in
 the locking device; lift up the front, drawer can be taken out
 for fixing with screws 4mm

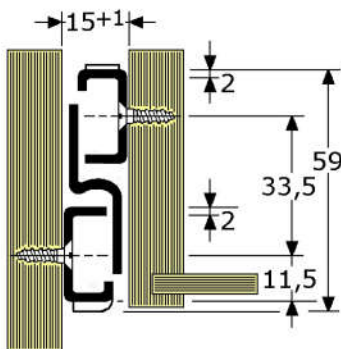


type	length	extension	width	load capacity	per
926740	MR-674 250mm	265mm	15mm	50 Kg/Pr	11 Pr
926741	MR-674 300mm	315mm	15mm	50 Kg/Pr	6 Pr
926742	MR-674 350mm	365mm	15mm	50 Kg/Pr	6 Pr

full extension drawer slides with white rollers
 steel white coated
 full extension +0/30mm, highness 59mm, side mounting
 protection between unitted disconnecting by fixed
 black nylon locking device, but drawer can easy be demounted
 if you pull out the drawer full, the drawer will be blocked in
 the locking device; lift up the front, drawer can be taken out
 for fixing with screws 4mm

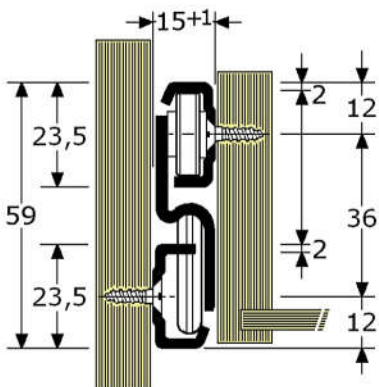

type	length	extension	width	load capacity	per
926761	W-60 300mm	300mm	15mm	50 Kg/Pr	6 Pr
926763	W-60 400mm	430mm	15mm	50 Kg/Pr	11 Pr
926764	W-60 450mm	480mm	15mm	50 Kg/Pr	6 Pr
926765	W-60 500mm	530mm	15mm	50 Kg/Pr	1 Pr
926766	W-60 550mm	580mm	15mm	50 Kg/Pr	6 Pr

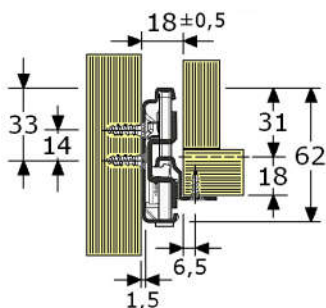


- 926863
- 926864
- 926866
- 926867

full extension drawer slide (3-parts)
 steel white coated
 full extension +/-30mm, progressive action, highness 62mm
 space required 18mm, for bottom mounting with screwholes

with (p/Pr) 10 white DELRIN rollers ø26mm
 all rollers placed on middle profile
 maximum loading 60 Kg/pair (only for normal vertical use)

without softclosing
 cabinet profile and drawer profile with screwholes 3,5/4mm

type	length	extension	width	load capacity	per
W-86	415mm	385mm	18mm	60 Kg/Pr	5 Pr
W-86	465mm	435mm	18mm	60 Kg/Pr	5 Pr
W-86	565mm	535mm	18mm	60 Kg/Pr	5 Pr
W-86	615mm	585mm	18mm <td 60 Kg/Pr	5 Pr	

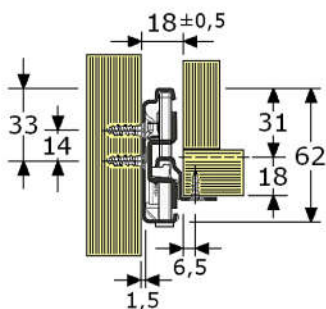


- 926882
- 926883
- 926884
- 926885
- 926886
- 926887

full extension drawer slide (3-parts)
 steel white coated
 full extension +/-30mm, progressive action, highness 62mm
 space required 18mm, for bottom mounting with screwholes

with (p/Pr) 10 white DELRIN rollers ø26mm
 all rollers placed on middle profile
 maximum loading 60 Kg/pair (only for normal vertical use)

with (removable) integrated (black) EasyClose softclosing
 protection between unintended disconnecting with switch (T)
 high lateral stability through specially formed profiles & rollers
 with nylon parts between the profiles prevent metallic noise
 cabinet profile and drawer profile with screwholes 3,5/4mm

type	length	extension	width	load capacity	per
EW-86	365mm	335mm	18mm	55 Kg/Pr	5 Pr
EW-86	415mm	385mm	18mm	55 Kg/Pr	5 Pr
EW-86	465mm	435mm	18mm	55 Kg/Pr	5 Pr
EW-86	515mm	485mm	18mm	55 Kg/Pr	5 Pr
EW-86	565mm	535mm	18mm	55 Kg/Pr	5 Pr
EW-86	615mm	585mm	18mm	55 Kg/Pr	5 Pr

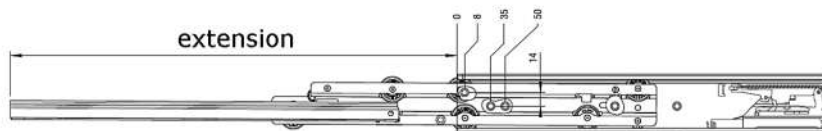

PIMEX B.V.
 Coenecoop 131
 2741 PJ WADDINXVEEN (NL)
 Tel. (31) 182 - 61 11 66
 Fax. (31) 182 - 61 11 12
 Email: info@pimex.nl